


Secondary Impact Crushers - Allpactor - PKna For non abrasive material

- Hydraulic assistance with wedges to facilitate the adjustment of the gap
- Wedges for easy blow bars replacement
- Easy maintenance as wear parts are easily accessible
- The crusher can be fitted with internal equipment for abrasive material
- Blow bar lifting clamp for easy maintenance
- Grinding path in option : to give a better form to the final product

Secondary Impact Crushers

Allpactor - PKna - for non abrasive material

Type	Capacity (*) t/h	Motor kW	Opening H x L mm	Feeding Maxi. mm	Weight kg
PK 1110 na	80 - 150	90 - 132	400 x 1,080	180	9,500
PK 1115 na	120 - 250	132 - 250	400 x 1,580	180	12,000
PK 1415 na	150 - 300	160 - 250	600 x 1,580	220	18,000
PK 1420 na	250 - 500	250 - 400	600 x 2,080	220	24,000
PK 1425 na	300 - 600	315 - 450	600 x 2,580	220	30,000
with grinding path					
PKR 1110 na	80 - 120	110 - 132	400 x 1,080	180	11,000
PKR 1115 na	120 - 200	160 - 250	400 x 1,580	180	14,000
PKR 1415 na	160 - 250	200 - 300	600 x 1,580	220	20,000
PKR 1420 na	250 - 400	300 - 450	600 x 2,080	220	26,000
PKR 1425 na	300 - 500	400 - 550	600 x 2,580	220	32,500

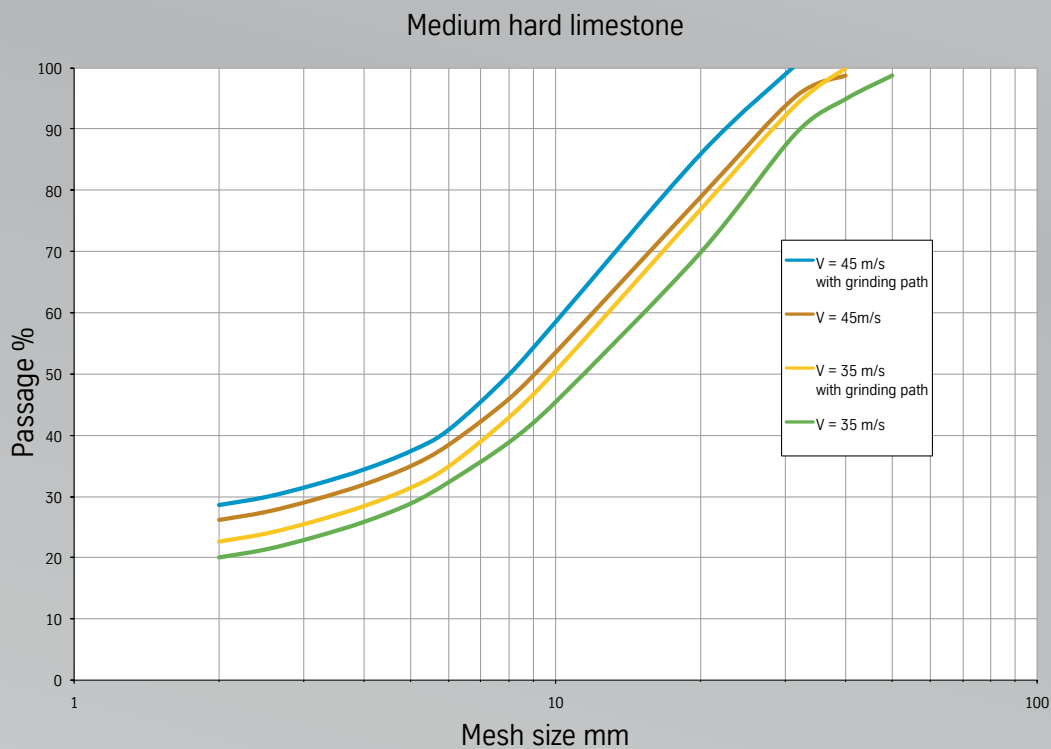

(*) depending on tip speed and kind of material

ThyssenKrupp KH Mineral SAS

Parc Industriel Sud - ZI Neuwald
 1, rue René François Jolly
 B.P. 70537
 F-57205 Sarreguemines
 Tél. (33) 03 87 98 73 73 - Fax (33) 03 87 98 89 18 ou (33) 03 87 95 40 73
 Email : contact@khmineral.com
 Internet : www.khmineral.com